




MASTER ABRASIVES

CASE STUDY

#1020

External Cylindrical Grinding Machine

Workpiece:	Shaft Clutch
Operation:	OD Grinding (3 setups)
Machine:	Micromatic SH100 CNC / 45mps
Cycle Time -1st setup:	300 seconds
Cycle Time -2nd setup:	310 seconds
Cycle Time -3rd setup:	94 seconds
Stock Removal:	0.3mm
Taper (3rd setup):	< 0.002°
Runout on W.R.T Centre:	0.003mm
Surface Roughness:	0.4 μ m Ra

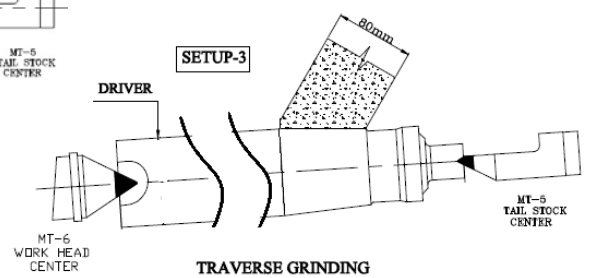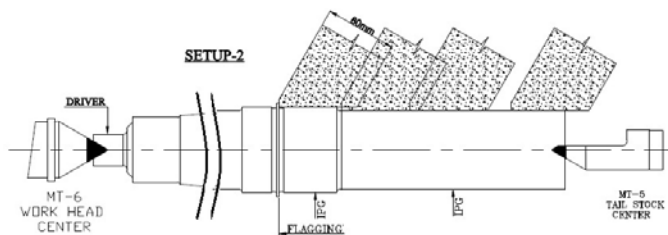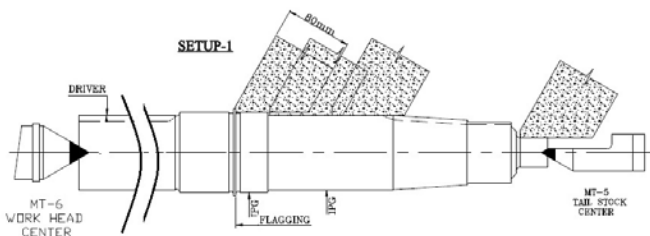

Copyright © 2020 Master Abrasives Ltd

CONTACT US FOR MORE INFORMATION

**MASTER
ABRASIVES**

T:01327-703813

sales@master-abrasives.co.uk

www.master-abrasives.co.uk